

AceCom Networks

VCL-MX Version 6
80 E1, 160Mbps Voice & Data Multiplexer

System Guide

AceCom Networks Pte Ltd.

200 Jalan Sultan, #02-13 Textile Centre,
Singapore 199018

Phone: +65 6295 3233, **Fax:** +65 6295 3133

E-mail: sales@acecomnet.com

Web Site: <http://www.acecomnet.com>

Index

S. No.	Particulars	Page No.
1	Foreword	3
2	Product Overview	4
3	Key Features	5
4	Additional Features	5
5	Highlights	6
6	Security and Password Features	6
7	Transmission Mediums	6
8	Multi-service platform	7
9	Configuration and Flexibility	7
10	Synchronization	7
11	Application of VCL-MX	8
12	System Overview and Architectural Details	8
13	Safety: Laser protection	8
14	Front View	9
15	Back View	10
16	Voice Interfaces	10
17	Data Interfaces	11
18	Chassis / System Backplane	11
19	System Management	11
20	Technical Specifications	12
21	Protection	19
22	Management Interfaces	19
23	Power Supply	19
24	Power Consumption	20
25	Environmental	20
26	Dimensions	20
27	Application Diagrams	21
28	Ordering Information	27
29	Support	32

Foreword

The VCL-MX Version 6 - 80 E1, 160Mbps Multiplexer is a compact, carrier class and cost-effective bandwidth provisioning equipment designed to manage and deliver services from the optical core to the access.

This system guide presents the technical specifications along with the functions and features of the product. It gives a brief description of the hardware and software associated with the VCL-MX Version 6 - 80 E1, 160Mbps Multiplexer. This user guide also gives an overview of the various applications in which VCL-MX Version 6 - 80 E1, 160Mbps Multiplexer can be used. These are explained with the use of application diagrams. These application diagrams are useful for the Network planning and design engineers.

Product Overview

VCL-MX Version 6 – 80 E1 Multiplexer may be used for inter-connecting legacy voice and data networks, provisioning and managing bandwidth on a E1 channelized level as well as 64Kbps, DS-0 time-slot level and as a digital-access cross-connect equipment. Due to the changing traffic patterns, there is a need to support multiple services from the same equipment like integrated data transport, better network management etc. This necessitated evolution to next generation E1 Multiplexer.



Redundant control card and power supply options make it an ideal choice for network service providers seeking to integrate and provide legacy and the next generation services from a single platform.

Next generation E1 Multiplexer has emerged as one of the most economical and technologically viable solutions for transmitting both voice and data over carrier networks. This technology offers savings on investments/power and space to service providers.

AceCom Networks provides efficient solutions in this field using the E1 Multiplexer series products. E1 Multiplexer provides a full range of solutions in this evolving field of next generation telecom solutions. E1 Multiplexer family provides the unique advantage of carrying both data and voice over PDH. In addition to being affordable, these products have built-in modularity, which allow easy upgradeability. This upgradeability feature allows the customer to evolve in a “build-as-you-grow” concept. Along with the AceCom as Network Management solution the E1 Multiplexer family provides the following features:

- Easy network manageability
- Lower cost per line
- Easy upgradeability
- Carrying both data and voice over PDH
- Easy integration to SDH network
- Higher reliability

Key Features

VCL-MX Version 6 – 80 E1, 160Mbps Multiplexer provides the advanced features and capabilities, listed below:

- 160Mbps, 80 E1 fully non-blocking cross-connect at 64Kbps (DS-0) level (2480 DS-0 – any to any time-slot cross-connect)
- Multi-service platform – may be used to provide a wide variety of voice and data services from single chassis
- 1+1 E1 Link Protection / E1 Port Redundancy
- 1+1 Control Card Processor Redundancy
- 1+1 Cross-Connect Redundancy
- 1+1 Timing (Synchronization Clock) Redundancy. User selectable synchronization priority.
- 1+1 48V DC Power Supply Redundancy (Dual Power Input – allows the equipment to be powered from two separate sources)
- 144 FXO or 144 FXS channels per unit.
- 72 E&M 2-wire / 4-wire channels per unit
- Any “mix” of data and voice channels in a single unit
- Universal Slots – slot independent system so that any type of interface card may be inserted and used in any card slot.
- Supports R2 CAS, ITU-T Q.421 and ITU-T Q.422 signaling
- Supports CAS Custom / User Programmable ABCD Signaling
- Bit Error Rate (BER) monitoring – BER thresholds to generate BER alarms automatically whenever alarm limits are exceeded.
- Supports Long Loops of up to 1200 Ohms
- Supports 75 VRMS and 90 VRSM Ring Voltage Options
- Supports A-law and Mu-law voice coding.
- Supports sinusoidal un-balanced ring output
- Provides a ring of ≥ 75 volts RMS into a load of 5 R.E.N. on each channel with a 0.30 Erlang traffic pattern (5 R.E.N. load = 5 parallel phone load on each line).
- May be used in a Point-to-Point, Point-to-Multi point, Add-Drop (drop-insert), Tree and Star topology
- Telnet
- SSH for secured access
- SNMP traps
- Maintains Access Security Log
- In-band and Out-of-band management
- GUI (Graphical User Interface)

Additional Features

- Voice and Digital Data services
- Any combination (“mix-n-match”) of Voice and Digital Data services deployed from a single VCL-MX “Smart Shelf” - 4, 8, 12, 16 channels per card
- Integrated IEEE C37.94 Teleprotection Interface
- Digital Data option may be used for internet access or video conferencing application
- Wireless applications including Cellular Networks
- Digital Microwave Radio
- SCADA applications
- ATM/Frame Relay circuit termination
- Powerful Network Management System for monitoring and network control
- Compliance with all relevant ITU-T (CCITT) recommendations
- 19-inch, 6U high construction.

Highlights

- Field upgradable to provide voice, data or both services
- Flexibility on use of transmission medium-copper, fiber or wireless
- Choice of Interfaces for Voice and Data Applications
- USB and RS232, Interface for local connection through the serial interface to the "Network Control and Management Software"
- In-band and Out-of-band system configuration and management interface.
- Channel assignment independent of slot position in the sub-rack
- Extensive set of alarms
- User Selectable Internal, External and Loop-timed clock synchronization priority options
- Universal slots - any interface card can plug in at any interface slot.
- OAM Card

Security and Password Features:

System Access, Control and Management Options:

- Telnet
- SSH
- CLI Control Interface (HyperTerminal or VT100)
- SNMP V2 Traps (MIB File provided).

OAM: Operation And Management Ports

- RS232 Serial Port
- USB COM Port
- 10/100BaseT Ethernet for remote access.

Security and Protection

- Secured Access via SSH V2
- Password Protection: Password Protection in compliance with the mandatory clauses of the
- GR-815-CORE-2 specifications for secured access control.
- Logging: Maintains a log of all successful and un-successful attempts. Logged information includes the ID and the IP address of the accessing entities. Alerts the administrator if the un-successful logging attempts exceed 3.
- Security Audit: All access logs for up to 30 days are maintained for security audit purposes.
- Security log entry of any request or activity including that user-ID (including IP address, if applicable), to establish user accountability
- Report Generation / Audit Trail
- Security Administration.

Transmission Mediums

The VCL-MX offers an excellent flexibility on the choice of transmission medium over which it may be deployed. The transmission medium can be either of the following:

- Copper
- Optical Fiber
- Wireless.

Multi-service platform

VCL-MX Version 6 - E1 160Mbps Multiplexer supports both data and voice traffic.

For voice traffic, it supports the following interfaces:

- FXO
- FXS
- E&M (2Wire / 4Wire)
- Hot-Line (Ring-Down)
- Ring Generator (75V RMS)

For data traffic, it supports the following interfaces:

- Channelized E1 / Fractional E1 data
- RS-232 asynchronous data
- V.24 synchronous data / asynchronous data
- G.703, @ 64 Kbps, co-directional
- V.35, V.36, X.21, V.11, RS530, RS449 synchronous, "n"x64Kbps data
- Analog I/O Card (Dry Contact)
- Universal DCE / DTE synchronous "n"x64Kbps data interface
- 8E1 plus 100Mbps Ethernet fiber optical transport interface along with the following:
 - EOW (Engineering Order Wire) channel for end to end installation and maintenance
 - Local and remote loop back test for diagnostics
 - 1+1 Fiber Path protection
 - ALS (Auto Laser Shutdown) facility for eye safety
 - 10/100M Ethernet Port - 100 Mbps Ethernet data transmission rate complies with IEEE8 02.3

Configuration and Flexibility

VCL-MX Version 6 - E1 160Mbps Multiplexer can be configured as an Add-Drop Multiplexer (ADM) and Terminal Multiplexer (TMUX). It can support diverse topologies like point-to-point, ring, star and tree.

It can be configured in various topologies supporting both electrical and optical interfaces. It can take modular cards, which would enable the customers to start small and grow as traffic demands scale.

Synchronization

Timing Options	Internal Clock, Loop-Timed Clock, External Clock. User selectable synchronization priority
Synchronization Sources	Internal Clock, span clock timing derived from incoming HDB3 links (Loop-Timed), External Clock, 75 Ohms (TTL), 2.048 Mbits and 120 Ohms (Bits clock)
Default Option	Internal Clock (Stratum 3)

Application of VCL-MX

POTS (voice), digital data or real-time video conferencing services (V.35, V.36, X.21) high-speed digital data interface options allow point-to-point network solutions for providing a video conferencing channel of up to 1920 Kbps).

- Junction Mux - for digital interconnection of analog exchanges
- Point-to-Point, Point-to-Multi point, Add-Drop (drop-insert), Tree and Star topology applications
- Wireless network applications
- High-speed data ports for digital communication links providing Leased Lines access to Internet Service Providers (ISPs) with speeds ranging from 64Kbps up to 1920 Kbps digital data interface options
- Micro-Cellular infrastructure applications for providing cell-switch connectivity
- Wide area networking
- Internet access over POTS lines - All POTS interfaces operate @ 64Kbps and support V.34 (33.6Kbps) dial-up modems.

System Overview and Architectural Details

The VCL-MX Version 6 – 80 E1, 160Mbps Multiplexer provides full range of POTS (voice) and digital data services to subscribers located at different locations, requiring to interconnect and establish a voice and data network over an E1 Link. The VCL-MX is a simple, yet powerful E1 Channel Bank for connecting and integrating analog communication equipment with digital E1 services.

The VCL-MX Version 6 – 80 E1 160Mbps Multiplexer provides cross connect, voice telephony and digital data services for applications, which may include:


E1 Multiplexer platform has been envisaged to address the growing demand for an ultra-compact Add-Drop Multiplexer (ADM) and provide Ethernet-over-PDH mapping functions. It can be configured in various topologies such as linear, star, ring and bus.


VCL-MX Version 6 – 80 E1, 160Mbps Multiplexer has a multi-slot chassis with TDM backplane. In the chassis, there are ten (10) traffic slots meant for tributary cards (line cards). The line cards can support various type of interface cards, which include E1, Voice and very wide variety of Data interfaces.

Two slots are reserved for 1+1 redundant system / control cards, which include the redundant cross connect, processor and aggregate interface functions. One dedicated slot exists for an OAM card, one for ring generation and two slots for 1+1 redundant power supply.

Safety: Laser protection

The optical interfaces of the VCL-MX Version 6 - E1 160Mbps Multiplexer come with Class 1, Small Form-factor Pluggable (SFP)-based optical line interfaces with digital diagnostics capability for SFPs on the optical interface cards.

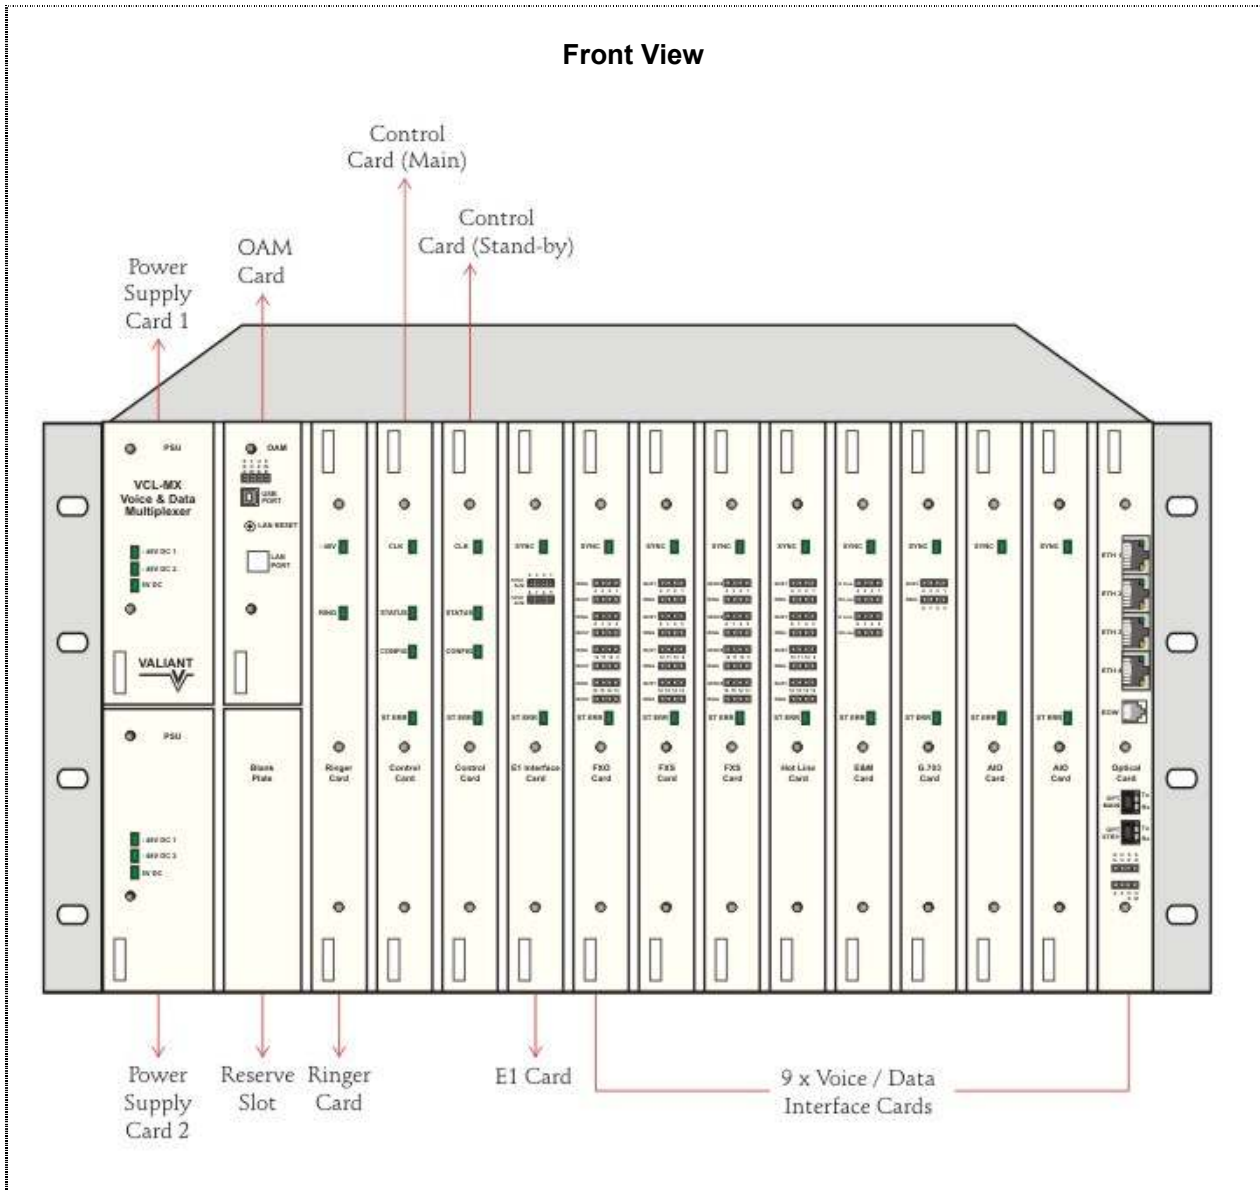

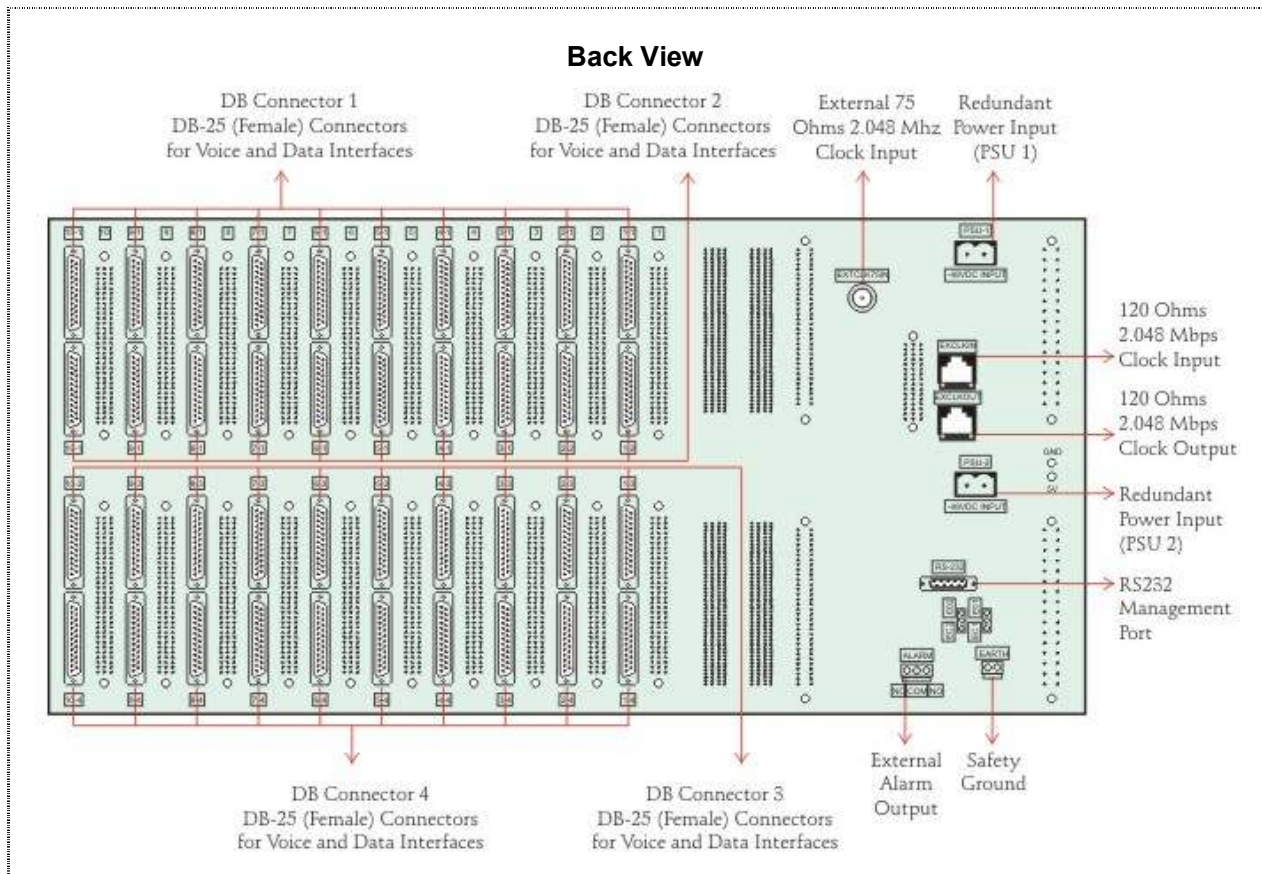

The Multiplexer may be used in Terminal or Drop-Insert configuration to provide:

- Toll Quality Voice Services
- Interconnect LAN (Campus Network)
- Interconnect computer terminals various types of data terminals
- Provide LAN-WAN Interconnectivity.

Voice Interfaces

For voice traffic, it supports the following interfaces:

- FXO
- FXS
- E&M (2-wire and 4-wire)
- Hot-Line (Ring-Down)
- Ring Generator (75V RMS)

Data Interfaces

For data traffic, it supports the following interfaces:

- Channelized E1 / Fractional E1 data with full cross-connect capability at 64Kbps, DS-0 level
- RS-232 asynchronous data
- V.24 synchronous data / asynchronous data
- G.703, @ 64 Kbps, co-directional
- V.35, V.36, X.21, V.11, RS530, RS449 synchronous, "n"x64Kbps data
- Analog I/O Card (Dry Contact)
- IEEE C37.94 Teleprotection Interface
- Universal DCE/DTE synchronous "n"x64Kbps data interface
- 8E1 plus 100Mbps Ethernet fiber optical (1+1) protected transport interface

Chassis / System Backplane

All connections are made at the rear of the chassis, providing interconnections between the various plug-in cards and to the network. VCL-MX Version 6 - E1 160Mbps Multiplexer and supports high-density PDH cards. The line cards terminate a combination of Voice, Data and E1 Interfaces.

The VCL-MX E1 Multiplexer has a 160 Mbits/sec backplane and provides a host of features including, channel drop and insert facility over a network of VCL-MX E1 Multiplexers, for voice and data applications.

An extensive set of alarms, for easy maintenance are provided in the system.

System Management

VCL-MX Version # 6 - Voice and Data Drop-Insert Multiplexer offer a variety of management options, The VCL-MX E1 multiplexer management software can be configured using CLI (English text) commands and GUI (Graphical User Interface). The management and configuration commands may be executed from a VT100 terminal, Windows HyperTerminal, any DOS based system, Linux or UNIX based system, or Telnet (remote management).

The equipment provides a wide choice of access ports for connecting to and executing management and configuration commands through its OAM Card

The OAM card provides:

- a) COM Port (RS232 Serial Port).
- b) USB Port
- c) 10/100BaseT Ethernet Port (each multiplexer may be assigned an IP address and connected to a LAN / IP network for remote access and management through the 10/100BaseT Ethernet Port for out-of-band configuration, management and access).
- d) Telnet
- e) SSH
- f) SNMP, V2
- g) Additionally, a Windows based GUI (Graphical User Interface) for easy configuration, management and access.

The VCL-MX has an effective, CLI (text) and GUI based "Network Management Interface", which may be used for configuring and monitoring multiple systems from a single central location.

Technical Specifications:

E1 Interface: (Part No. VCL-MX-1520-E1-5.0)

Maximum number of interface cards (in a single chassis)	As per requirement and upto 10 Used to map with Voice and Data Interface
Number of interfaces per E1 Interface Card	8 E1 Interfaces
Conformity (electrical)	G.703
Frame structure	As per ITU (CCITT) G.704
Signaling	Channel Associated Signaling
PCM Sampling Rate	8000 Samples / sec
Bit rate	2048 Kbps ± 50 ppm
Code	HDB3, 50 % Duty Cycle
Nominal Impedance	120Ω balanced / 75Ω unbalanced
Peak voltage of a mark For 120 Ω Balanced interface 75 Ω Unbalanced interface	3.0 V ± 0.3 V 2.37 V ± 0.237 V
Peak voltage of a space For 120 Ω Balanced interface 75 Ω Unbalanced interface	0 V ± 0.3 V 0 V ± 0.237 V
Nominal pulse width	244 ns
Pulse mask	As per ITU (CCITT) Rec. G.703
Output jitter	<0.05 UI (in the frequency range of 20Hz to 100 KHz)
Permissible Attenuation	6 dB at 1 MHz
Return loss at: 51.2 KHz to 102.4 KHz 102.4 KHz to 2048 KHz 2048 KHz to 3072 KHz	> 12dB > 18dB > 14dB
Jitter tolerance	As per ITU (CCITT) G.823
Frame alignment	As per ITU (CCITT) G.732
Loss and recovery of frame alignment	As per clause 3 of ITU (CCITT) G.732
Loss and recovery of multi-frame alignment	As per clause 5.2 of ITU (CCITT) G.732

FXS, Voice Frequency Interface: (Part No. VCL-MX-1525-16-5.0)

Maximum number of interface cards	9
Number of channels per card	16
Interface type	FXS, A-law, 8 bit/sample, A=87.6 / 87.7, 13 segment coding
Maximum number of channels (In a single chassis)	144
Transmission performance	Fully compliant to ITU (CCITT) G.712 specification
Line impedance	600 Ω (900 Ω optional)
Voice channel frequency	300Hz-3400Hz
Insertion loss / gain	-2.0 dB Nominal (user adjustable) Adjustable range -30 dB to +3 dB in steps of 0.5dB
User selectable range for gain / insertion loss	0 dB to 18 dB
Idle channel noise	≤ - 65 dB
Return loss	300Hz – 600Hz - ≥ 12 dB 600Hz – 3400Hz - ≥ 15 dB
Longitudinal balance	≥ 46 dB between 300Hz to 3400Hz
Ring frequency	16 Hz, 20 Hz, 25 Hz, 50 Hz
Ring voltage	≥ 75 volts RMS into a load of 5 R.E.N. with a 0.30 Erlang traffic pattern
Subscriber loop current	≥ 30mA into a subscriber loop of 1200 Ohms
Overload level	+3.14 dBm ± 0.5 dBm
Battery reversal	All channels
Dial pulse speed	50 pps - Pulse Dialing ≤ ± 2 ms / DTMF Dialing

FXO, Voice Frequency Interface: (Part No. VCL-MX-1530-16-5.0)

Maximum number of interface cards	9
Number of channels per card	16
Interface type	FXO A-law, 8 bit/sample, A=87.6 / 87.7, 13 segment coding
Maximum number of channels (In a single chassis)	144
Transmission performance	Fully compliant to ITU (CCITT) G.712 specification
Line impedance	600Ω (900Ω optional)
Voice channel frequency	300Hz-3400Hz
Insertion Loss / Gain	-2.0 dB Nominal (user adjustable) Adjustable range -30 dB to +3 dB in steps of 0.5 dB
User selectable range for gain / insertion loss	0 dB to 18 dB
Idle Channel Noise	≤ -65dB
Return loss	300Hz - 600Hz - ≥ 12 dB 600Hz - 3400Hz - ≥ 15 dB
Longitudinal balance	≥ 46 dB between 300Hz to 3400Hz
Overload Level	+3.14 dBm ± 0.5 dBm
Battery reversal	All channels
Dial pulse speed	50 pps - Pulse Dialing ≤ ± 2 ms / DTMF Dialing

Hot-Line Interface Card: (Part No. VCL-MX-1525HTL-16-5.0)

Number of channels per card	16
Maximum number of interface cards	9
Maximum number of channels	144
Interface type	Hot-Line A-law, 8 bit/sample, A=87.6 / 87.7, 13 segment coding
Transmission performance	Fully compliant to ITU (CCITT) G.712 specification
Line Impedance	600Ω (900Ω optional)
Loop resistance	Upto 2000 Ohms
Voice channel frequency	300Hz-3400Hz
Insertion loss / gain	-2.0 dB Nominal (user adjustable) Adjustable range -30 dB to +3 dB in steps of 0.5 dB
User selectable range for gain / insertion loss	0 dB to 18 dB
Idle channel noise	≤ -65 dB
Return loss	300Hz - 600Hz - ≥ 12 dB 600Hz - 3400Hz - ≥ 15 dB
Longitudinal balance	≥ 46 dB between 300Hz to 3400Hz
Ring frequency	16 Hz, 20 Hz , 25 Hz, 50 Hz
Ring voltage	≥ 75 volts RMS into a load of 5 R.E.N. with a 0.30 Erlang traffic pattern
Subscriber loop current	≥ 30mA into a subscriber loop of 1200 Ohms
Overload level	+3.14 dBm ± 0.5 dBm
Dialing	Ring-down

E&M 2 Wire / 4 Wire Voice Frequency Interface (Part No. VCL-MX-1535-08-5.0)

Number of channels per card	8
Maximum number of interface cards	9
Maximum number of channels	72
Interface type	2W / 4W E&M, Type II and Type V A-law, 8 bit/sample, A=87.6 / 87.7, 13 segment coding
Transmission performance	Fully compliant to ITU (CCITT) G.712 specifications
Line impedance	600Ω (900Ω optional)
Voice channel frequency	300Hz-3400Hz
Insertion loss / gain	-2.0 dB Nominal (user adjustable) Adjustable range -30 dB to +7 dB in steps of 0.5 dB
User selectable range for gain / insertion loss	0 dB to 18 dB
Idle channel noise	≤ 65 dB

Return loss	300Hz - 600Hz - ≥ 12 dB 600Hz - 3400Hz - ≥ 15 dB
Longitudinal balance	≥ 46 dB between 300Hz to 3400Hz
Dial pulse speed	50 pps - Pulse Dialing $\leq \pm 2$ ms / DTMF Dialing
Maximum M-Lead resistance	1200 Ohms
Maximum M-Lead current drain	≤ 5 mA
Maximum E-Lead current	≤ 100 mA

Low Speed Data Interface Asynchronous RS232 (Part No. VCL-MX-1559-08-5.0)

Number of interfaces per card	8
Maximum number of interface cards	9
Mode	Asynchronous, RS232 (V.24/V.28 line drivers) - DCE
Bit rate	50 bps to 19.2 Kbps
Character length	5 / 6 / 7 / 8 (auto-select)
Stop bits	1 / 1.5 / 2 (auto-select)
Parity	Even / Odd / 0's / 1's / none (auto-select)

64Kbps Data Interface (Part No. VCL-MX-1545-04-48)

Number of interfaces per card	4
Maximum number of interface cards	9
Mode – Synchronous - Interface	V.35 / V.36 / X.21 / RS530 / V.24 / V.11 / V.28 - DCE
Mode - Asynchronous - Interface	RS232 / RS485 / V.24 / V.11 / V.28 - DCE
Mode - Sub Rate Multiplexing - Interface	RS232 / RS485 / V.24 / V.11 / V.28 - 4 Asynchronous data channels multiplexed into one 64 Kbps timeslot - DCE
Conformity	EIA and ITU-T
Synchronous Bit rate	V.35 / V.36 / X.21 / RS530 / V.11 @ 64 Kbps V.24 @ 300, 600, 1200, 2400, 4800, 9600, 19200 bps
Asynchronous Bit rate	50 bps to 19200 bps

G.703 @ 64kbps, Synchronous Data Interface: (Part No. VCL-MX-1560-08-5.0)

Interface	G.703 @ 64 Kbps
Number of interfaces per card	8
Maximum number of interface cards	9
Conformity	To (CCITT) Rec. G.703
Mode	Synchronous, Co-directional
Bit rate	64Kbps

Analog I/O Interface Card: (Part No. VCL-MX-1547-16-48)

Description: This interface card provides 8 Analog I/Os that may be used to extend either Dry Relay Contacts (Relay Normally-Open or Relay Normally-Close) or operate switches remotely (using Dry Relay Contacts rated 1A @ 60Volts DC) between any two Multiplexers using a 64 Kbps time-slot.

Maximum number of channels	72 / 144
Maximum number of interface cards	9

Relay Specifications (Drivers)

Maximum switching power	60 W (approximately)
Maximum switching voltage / current	60V DC, 1 A 250V AC, 1 A
Isolation	2.5 KVA Minimum
Typical number of operations	> 1 million

Dry Contacts Sensors

Maximum number of dry contact sensors	8
Maximum current	50 mA
Typical current	20 mA
Reference source voltage	3.3 Volts

Universal Data Interface: High Speed Synchronous “n x 64” Data Interface Type - User Configurable DCE-DTE: (Part No. VCL-MX-1558-04-48)

Interface	V.35 (DTE/DCE) V.36 (DTE/DCE) X.21 (DTE/DCE) V.11 (DTE/DCE) RS422 (DTE/DCE) RS530 (DTE/DCE)
Number of interfaces per card	4, (“N” x 64KBits/sec. per card)
Maximum number of interface cards	9
Bandwidth	(“N” x 64 Kbits/sec. interface maximum value of “N” =30)-user selectable
Conformity	Universal user-configurable as above
Mode	Synchronous
Bit rate	64 Kbps to 1920 Kbps
User interface	DCE/DTE (User programmable for DTE/DCE mode)

High Speed “n x 64” Data Interface Type: 10/100BaseT Ethernet with Electrical Ethernet: (Part No. VCL-MX-1595-04-5.0)

Interface	10/100BaseT (Electrical)
Number of interfaces per card	4 Ports (4 x 10/100BaseT Electrical)
Maximum number of interface cards	9
Application	Point to point
Bandwidth	(“N” x 64 Kbits/sec. interface minimum value of “N” =1 maximum value of “N” =30) - user selectable
Aggregate bandwidth	1920Kbps – maximum, user programmable in steps of 64Kbps from 64 Kbps to 1920Kbps.
Conformity	10/100BaseT Ethernet Electrical
User interface	10/100BaseT

**8 E1 Plus 100Mbps Ethernet Fiber Optical Transport Interface
 (Part No. VCL-MX-1551-5.0-WLWL-DKM)**

Optical	
Number of optical ports	1+1 redundant, automatic link protection
Channel capacity	8E1 Plus 100Mbps Ethernet
Jitter character	ITU-T G.742, G.823 compliant
Type of transmitter	Class 1 Laser
Transmitter power	-11 dBm to +3 dBm - as ordered 20 km, 40 km, 80 km, 120 km reach – as ordered
Receive sensitivity	- 34 dBm
Bit rate	155 Mbps
Wavelength	850 nm multimode / 1310nm singlemode / 1550nm singlemode (optional)
Optical connector	LC (MSA Compliant SFP Module)
Fully compliant with ITU-T G.957, G.958 Specification	
Class 1 Laser Product, Compliant with IEC 60825-1	
Compliant with Telcordia (Bellcore) GR-468-CORE	
Safety	
Class 1 Laser	
Auto Laser Shut Down in the event of fiber break.	
Ethernet Interface - 10/100BaseT	
Number of interfaces	4
Interface	RJ-45 Ethernet 10BaseT or 100BaseT-TX (auto sensing)
Compliance	Ethernet Version 2.0 IEEE802.3 10Base-T & 100Base-TX Activity, Full/half duplex.
Interface rate	100 Mbps Ethernet data transmission rate
Order Wire Interface	
Phone set	Standard 2-wire phone set
Bandwidth and coding	64 Kb/s PCM Channel, A-Law Coding

Integrated IEEE C37.94 Teleprotection Interface (Part No. VCL-MX-1552-SM)

Number of interfaces per card	4
Maximum number of interface cards	9
Maximum number of channels	36
Standards	IEEE C37.94
Optical	1310nm Single Mode (40KM / 80KM / 120KM)
Optical connector	FC-PC / LC (SFP)
Safety	Class 1 Laser

Integrated IEEE C37.94 Teleprotection Interface (Part No. VCL-MX-1552-MM)

Number of ports	4
Standards	IEEE C37.94
Optical	850nm Multi Mode (2KM) 1310nm Multi Mode (2KM)
Optical connector	FC-PC
Safety	Class 1 Laser

Protection

Remote / FXS (subscriber side) interface is protected against power surges and transients occurring from lightning and electric induction as per ITU-T Rec. K.20 towards line side.

Management Interface

<ul style="list-style-type: none"> • COM Port (RS232 Serial Port)
<ul style="list-style-type: none"> • USB Port
<ul style="list-style-type: none"> • 10/100BaseT Ethernet Port - Each multiplexer may be assigned an IP address and connected to a LAN / IP network for remote access and management through the 10BaseT Ethernet Port for out-of-band configuration, management and access
<ul style="list-style-type: none"> • Telnet
<ul style="list-style-type: none"> • SSH
<ul style="list-style-type: none"> • SNMP, V2
<ul style="list-style-type: none"> • Windows based GUI (Graphical User Interface) for easy configuration, management and access.

Power Supply

Input DC Voltage	-48V DC (nominal)
Range of Input	-36V to -72V DC
Output Voltage	5V filtered -48V (for terminal cards)
Full Load Current	4A at 48V DC
Input Voltage Reversal Protection	Provided in the Card
Over Current Protection	6A at 48V DC
Short Circuit Protection	Current limit – 6A. Recovers on removal of short
Efficiency at Full Load	>91%
Ripple at Full Load	<5mVrms
Spike at Full Load	<50mV

Power Consumption

Maximum Power Consumption	≤ 200 watts
---------------------------	-------------

Environmental

Temperature	-10°C to + 60°C
Humidity	95% R.H. (non-condensing)
Altitude	Upto 9,000 feet

Dimensions and Appearance

Height	266 mm (19 " 6U high)
Width	482 mm
Depth	270 mm
Weight	12 Kgs.
Chassis Color	Matte Black - Powder coated

Applications

The VCL-MX Version 6 - E1 160Mbps Multiplexer can be configured in Linear and Bus architectures. It can be used in the core of the network to provide high-speed backbone network.

The VCL-MX Version 6 - E1 160Mbps Multiplexer could provide the core for cellular or mobile networks between Mobile Switching Centers with subtended.

VCL-MX Version 6 - E1 160Mbps Multiplexer could also be used to provide versatile cross-connect functionality to connect telephone exchanges in VCL-MX Version 6 - E1 Multiplexer in dense metro areas.

Telco Networks Providing Voice and Data Services


VCL-MX Version 6 - E1 160Mbps Multiplexer is an ideal platform to provide high-end data and voice requirement of clients. VCL-MX Version 6 - E1 160Mbps Multiplexer can be installed at the regional and gateway Points of Presence (POP) locations in order to cater to the ever-growing data requirements of the customers while supporting legacy services at the same time.

The advantage that the VCL-MX Version 6 - E1 160Mbps Multiplexer provides the Telecom Service provider is as follows:


- The VCL-MX Version 6 - E1 160Mbps Multiplexer enables network simplifications by collapsing networks, nodes and services into a single multi service device. A smaller number of higher-density nodes and node types enable cost savings as a result of a smaller, more homogenous network to manage.
- The flexible architecture of the VCL-MX Version 6 - E1 160Mbps Multiplexer series ensures that the network is future proof, and the service provider has the flexibility of choosing a technology he thinks useful at any time in the future with minimal investment.

Application Diagram


Application 1: Providing Voice and Data Services on Microwave Radio Links

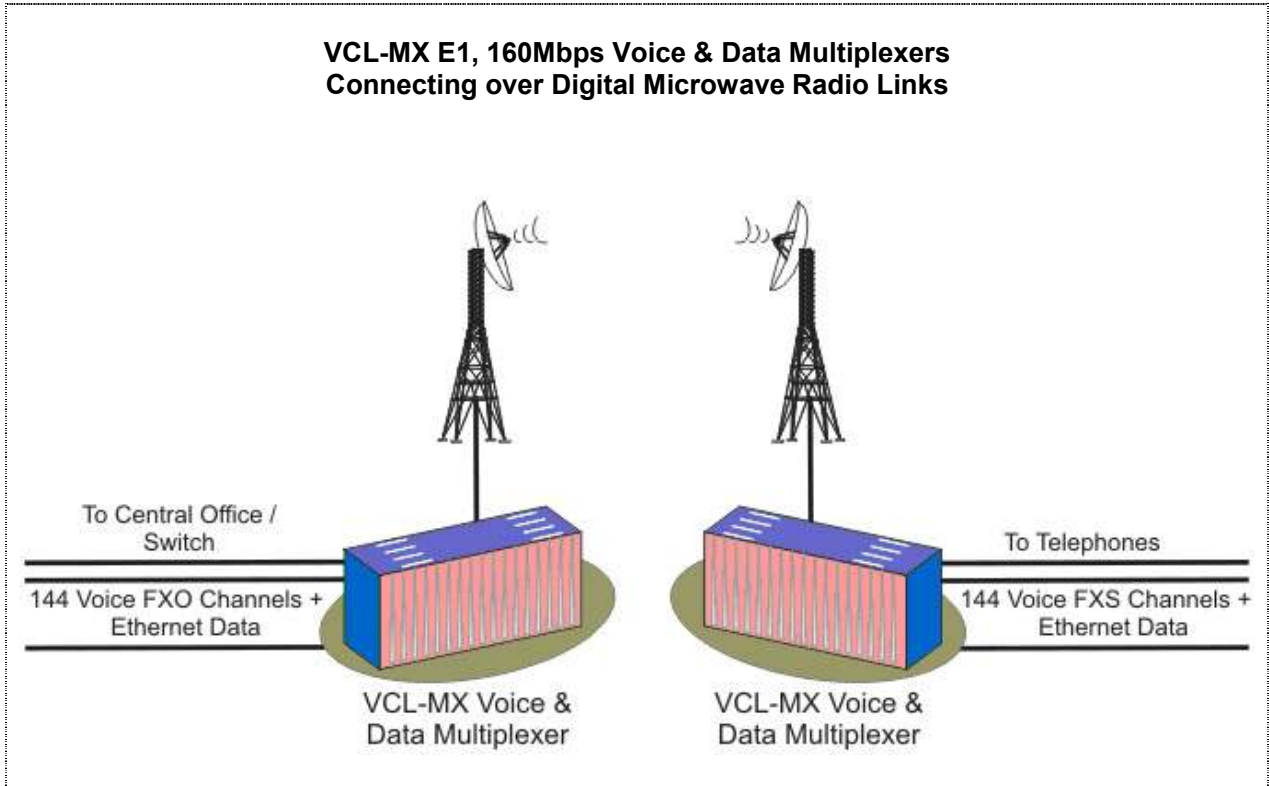


Application 2: Providing Voice and Data Services on Optical Fiber

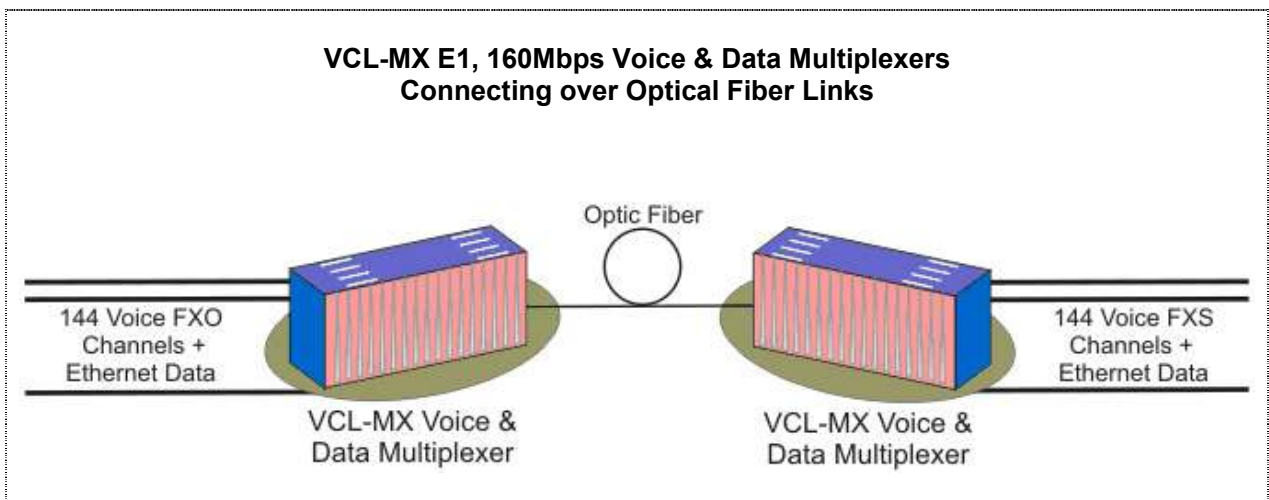


Application 3: Transporting E & M Channels

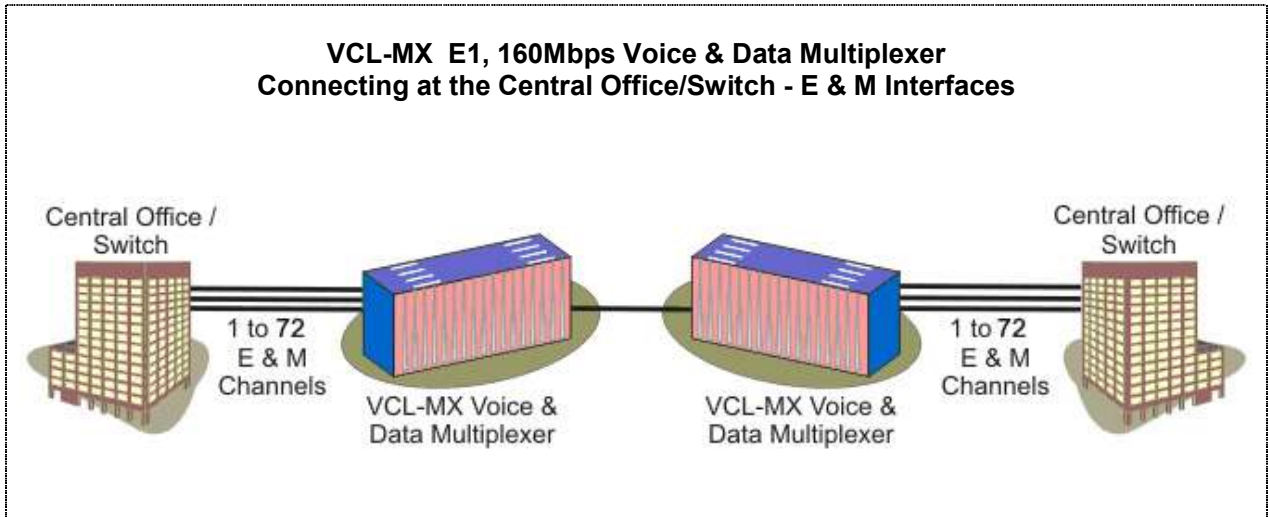


Application 4

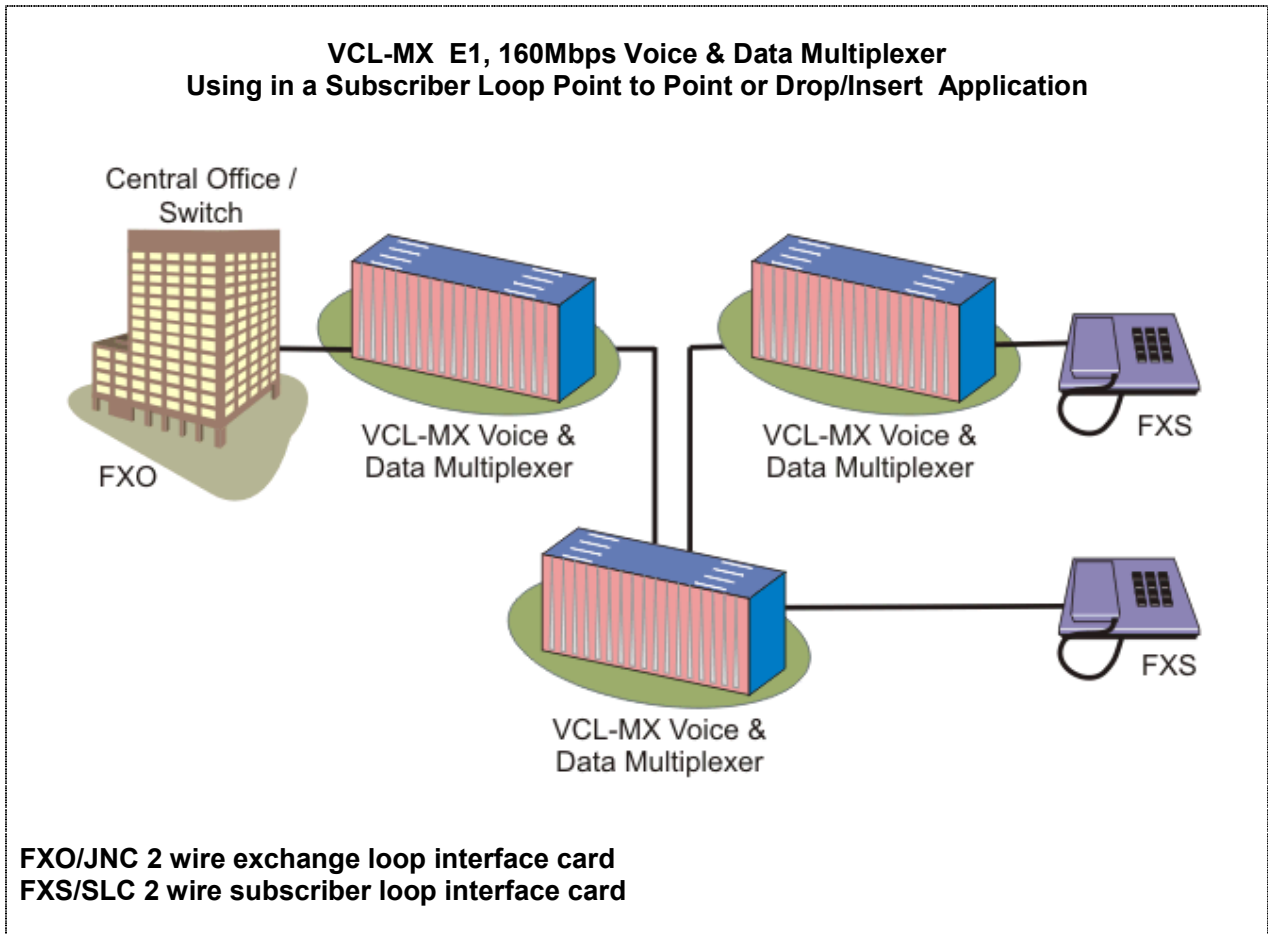


Application 5: Providing Synchronous “n x 64” Kbps Data Interfaces

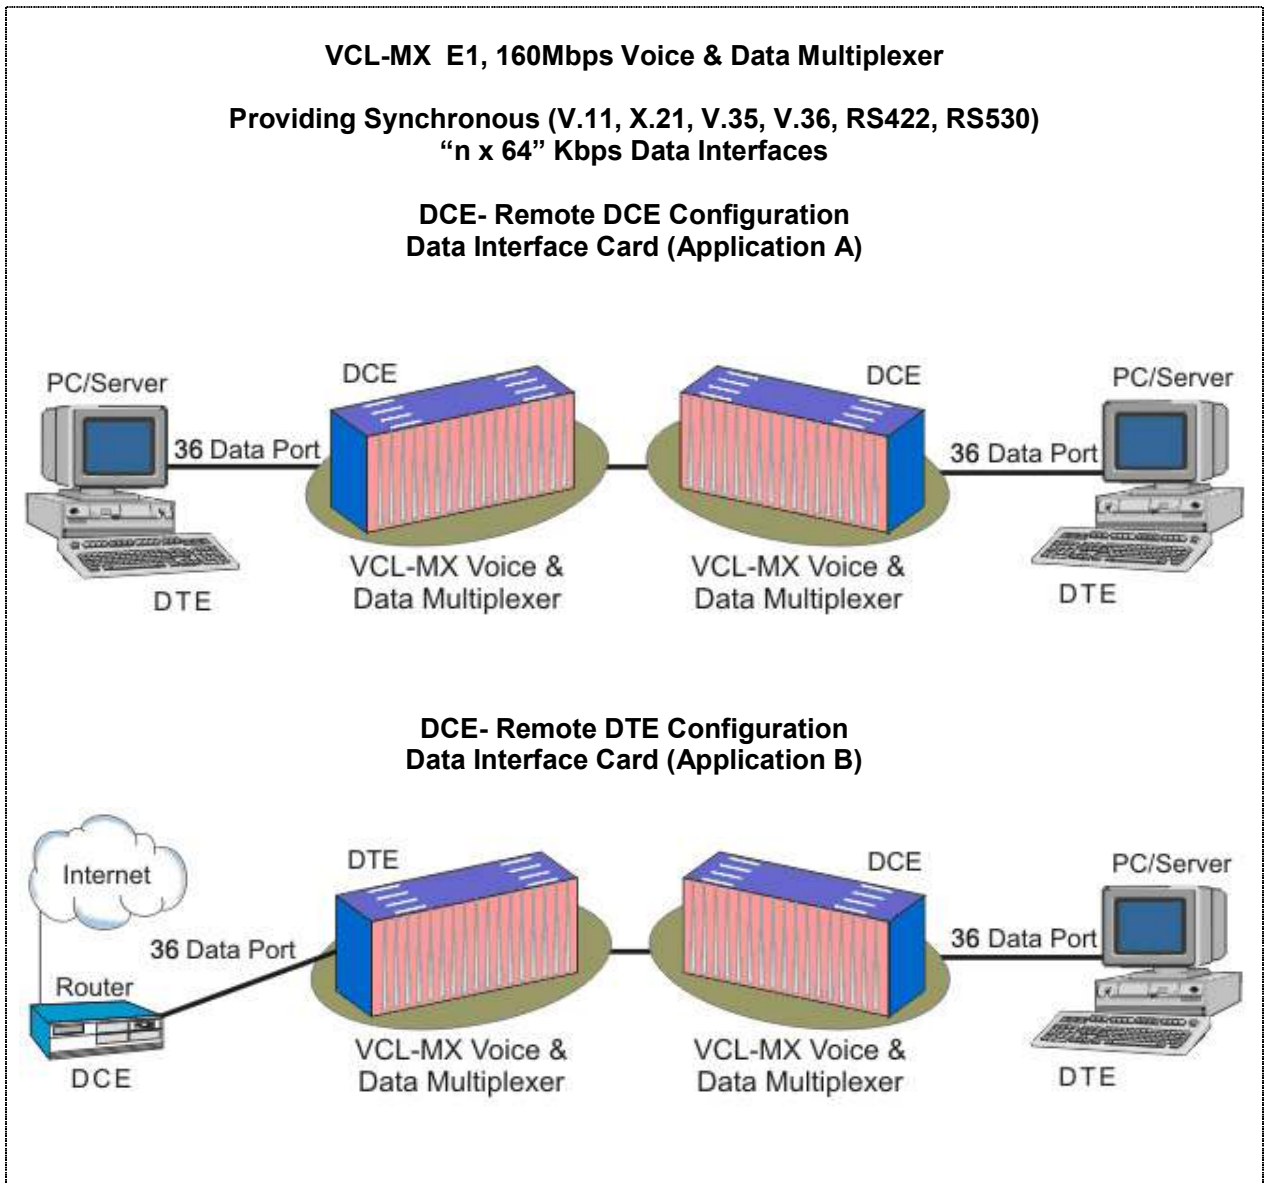


Application 6: Providing Voice and Synchronous “n x 64” Kbps Data Interfaces

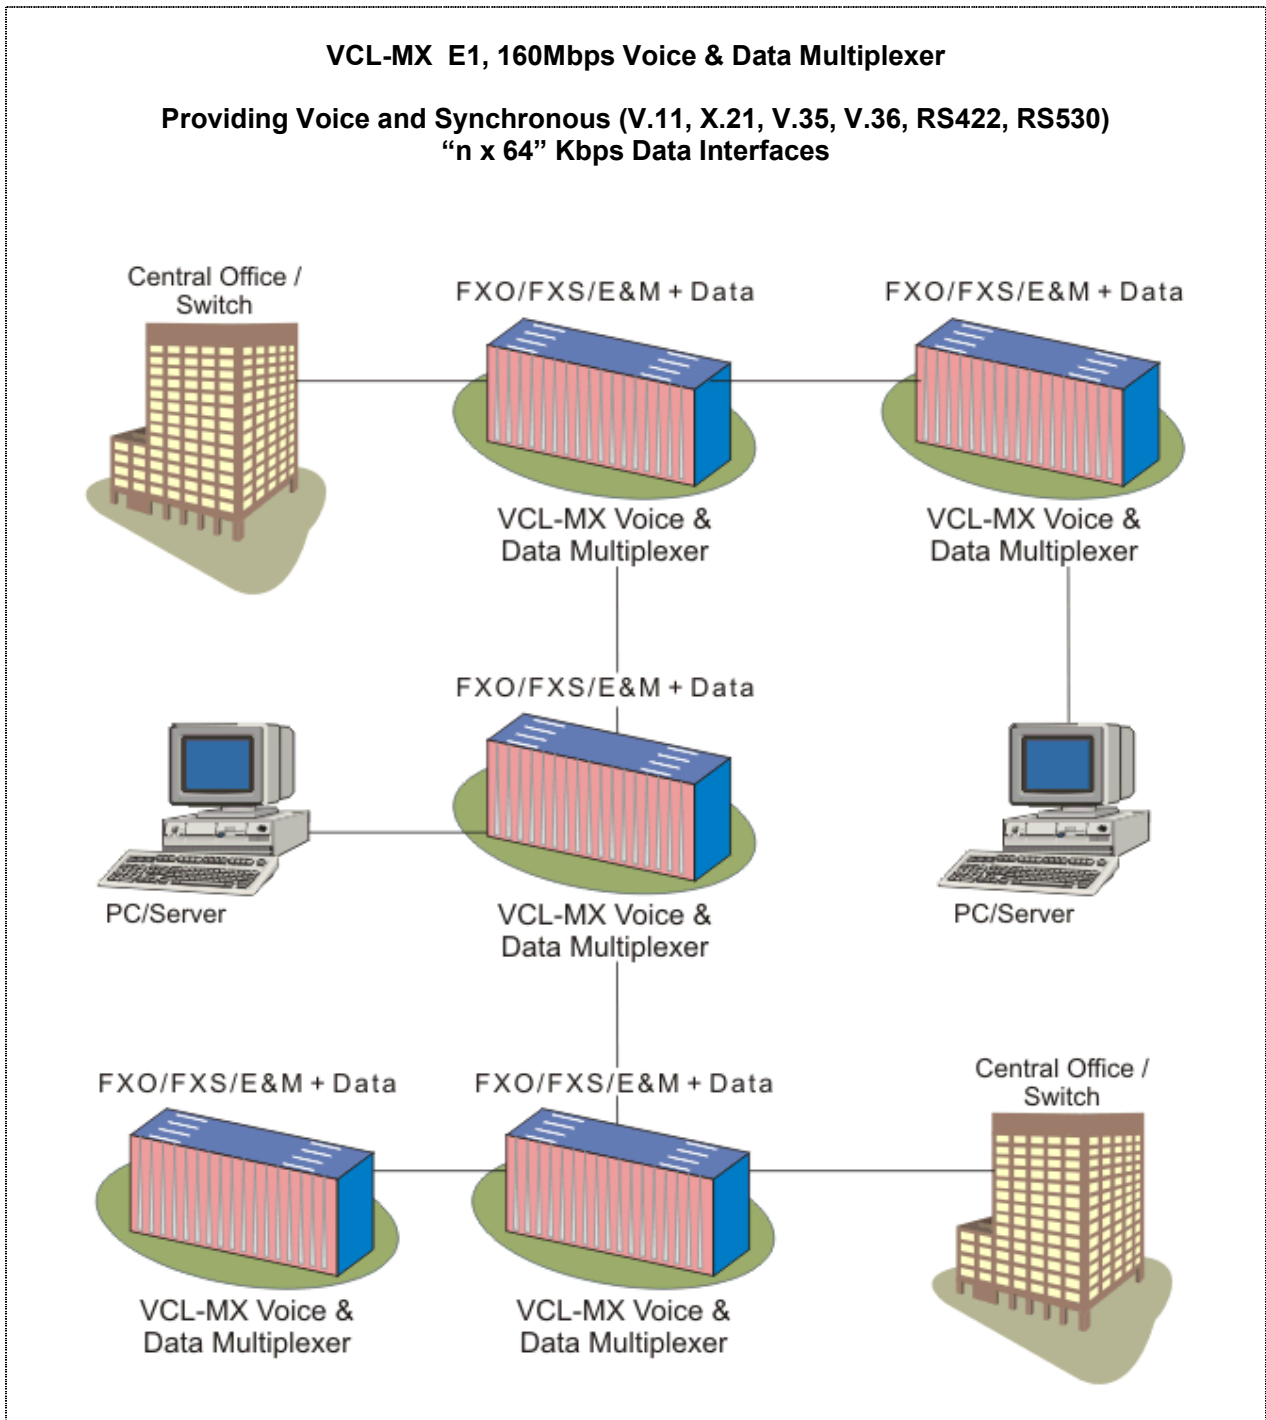

Application 7: For providing Hybrid Voice and Data Services

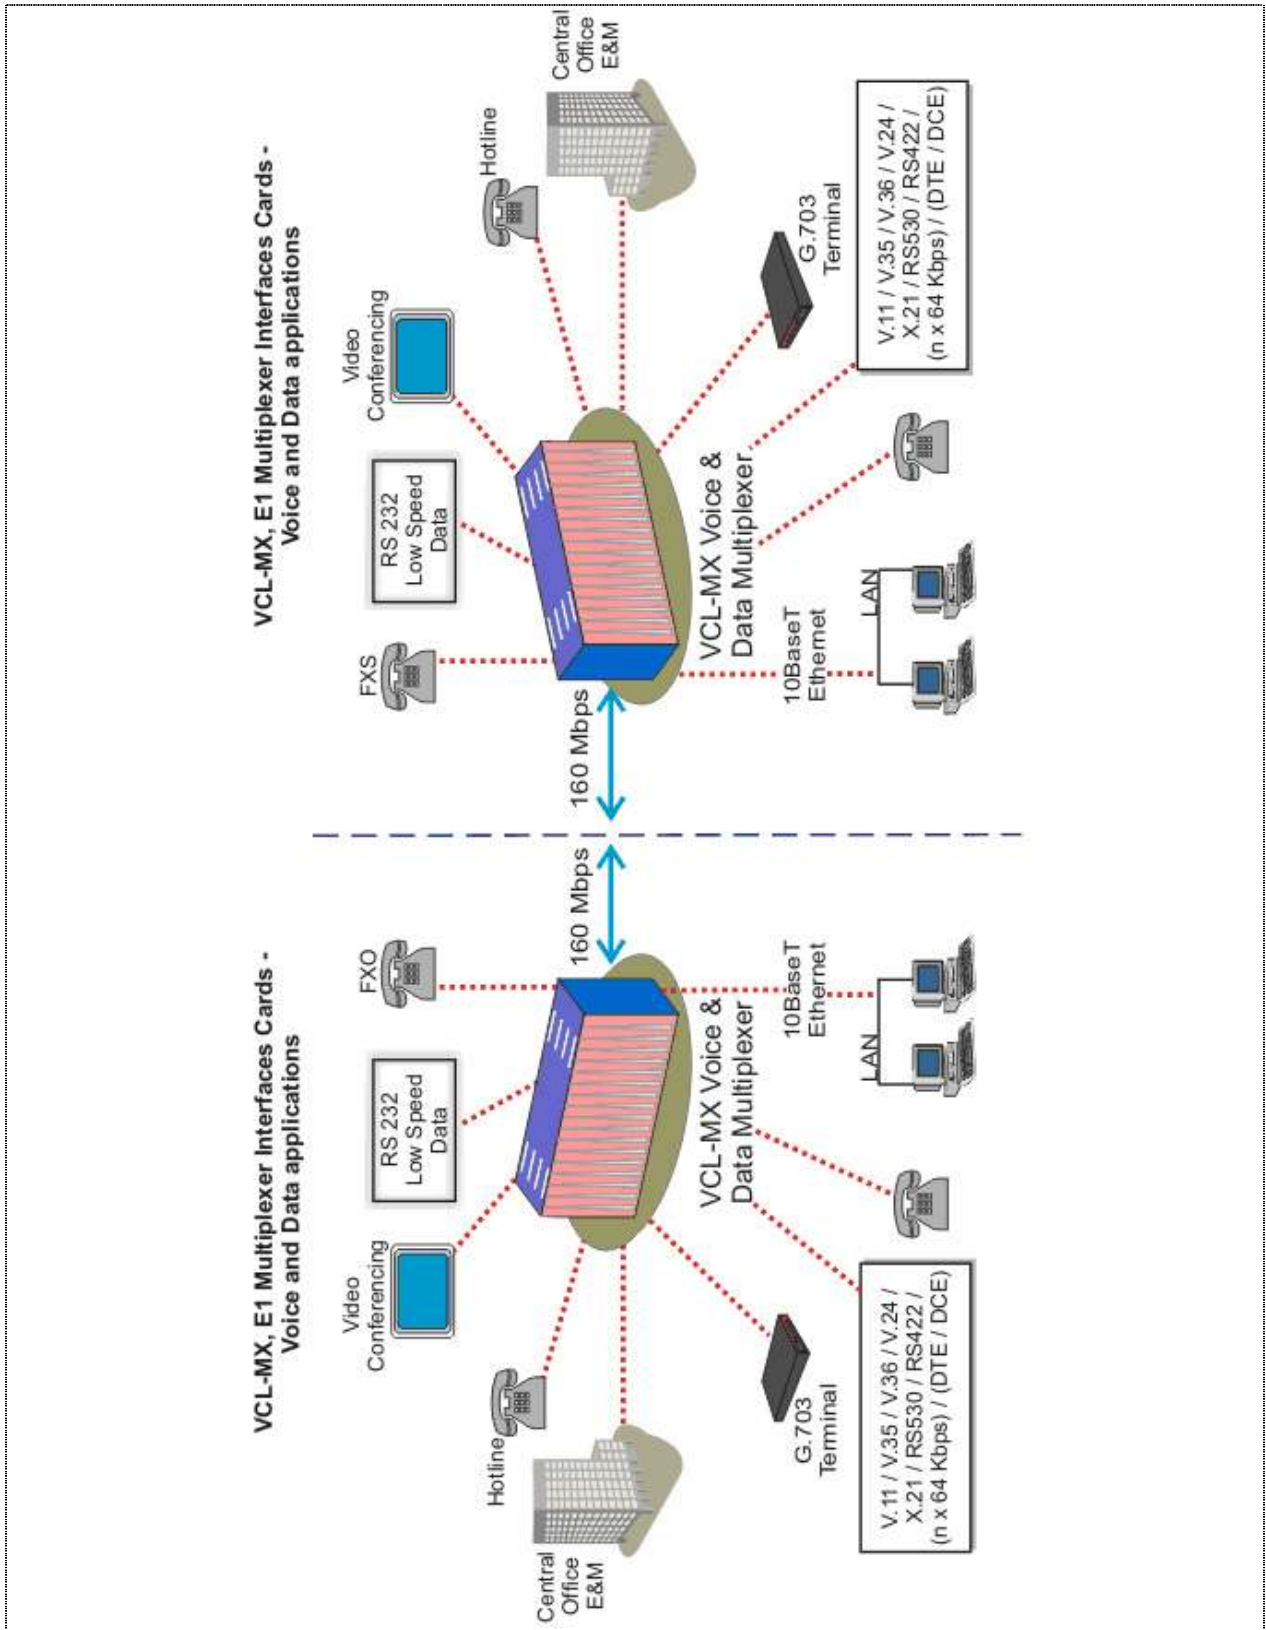

Application 8:

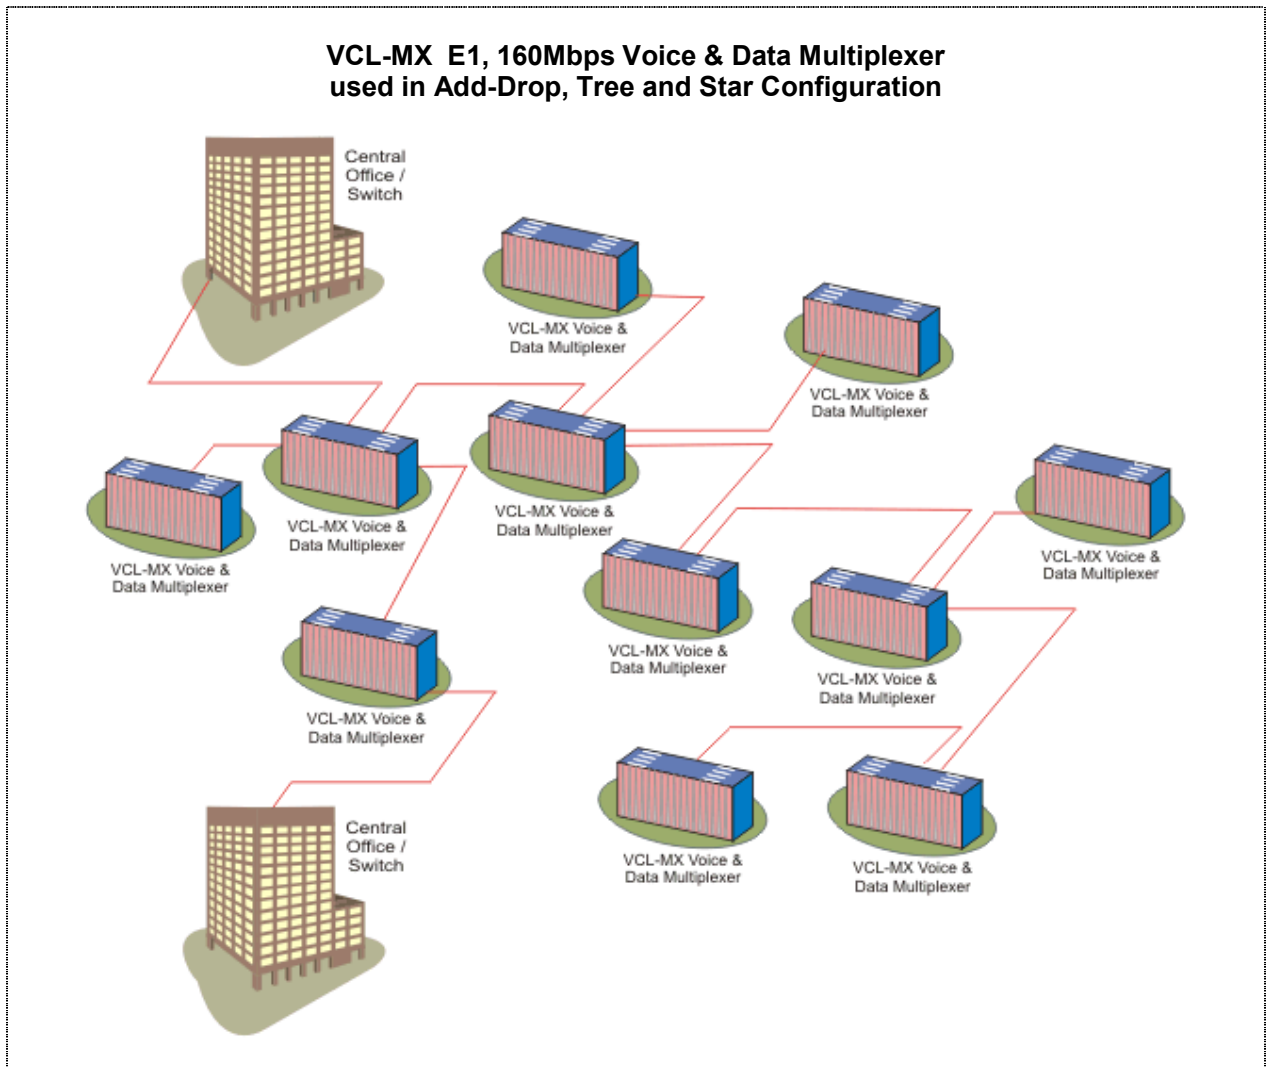

Ordering Information

VCL-MX E1 Core System (Common Equipment)

S. No.	Part #	Product Description
1.	VCL-MX-1500	Control Card Central processor, cross-connect and system control Card may be used in a 1 + 1 redundant Configuration Note: Please order 2 numbers for 1 + 1 redundancy
2.	VCL-MX-1510	(-) 48VDC Input Power Supply Card may be used in a 1 + 1 redundant Configuration Note: Please order 2 numbers for 1 + 1 redundancy
3.	VCL-OAM-2104-5.0	Management Card [RJ45F, DB9F COM, USB] OAM - Operations and Management Card for connecting the multiplexer to be managed in a LAN - allows the USER to assign a unique IP address to each multiplexer connected in a LAN to be managed from a single point. Telnet, SNMP (V2)
4.	VCL-MX-1506	19" Shelf 6U High (Sub-rack) with Connectorized Backplane Max. Ten (10) traffic slots meant for tributary cards (line cards)

VCL-MX, User Configurable Interfaces

S. No.	Part #	Product Description
1.	VCL-MX-1520-E1-5.0	8 E1 Interface Card Full capability to cross connect at DS-0, 64Kbps time-slot level as well as to inter-connect to voice and digital data services between 80 incoming E1 Ports (i.e., 80 separate E1 Links, 2480 DS-0 – any to any time-slot cross-connect). (For 8E1 Redundancy please order 2 Cards each Chassis)
2.	VCL-MX-1525-16-5.0	16 Port VF, RT (FXS) Line Interface Card 64Kbps/Sec. VF Channels per Remote Terminal Line Card. (Programmable Tx and Rx settings / VF range -30 dB to +3dB in steps of 0.5dB). (9 Cards / 144 Ports (Max) per Chassis)
3.	VCL-MX-1525HTL-16-5.0	16 Port VF, Hot-Line (FXS-Ring-Down) Line Interface Card: , 64Kbps/Sec. Hot-Line Channels per Card. (Programmable Tx and Rx settings / VF range -30 dB to +3dB in steps of 0.5 dB) (9 Cards / 144 Ports (Max) per Chassis)
4.	VCL-MX-1530-16-5.0	16 Port VF, CO (FXO) Line Interface Card 64Kbps/Sec. VF Channels per Central Office Line Card. (Programmable Tx and Rx settings / VF range -30 dB to +3dB in steps of 0.5 dB) (9 Cards / 144 Ports (Max) per Chassis)

5.	VCL-MX-1535-08-5.0	8 Port, VF, E&M 2 Wire / 4 Wire Interface Card 64Kbps/Sec. (Programmable Tx and Rx settings / VF range - 30 dB to +7dB in steps of 0.5 dB) (09 cards / 72 Ports (Max) per Chassis)
6.	VCL-MX-1540-15	Ring Generator Card (15 Watt) Central Office Ring Generator (75 volts RMS). [Supports up to 4 x 16 Port VF, FXS Cards] (To be ordered with FXS card (s) - one card per Chassis)
7.	VCL-MX-1540-30	Ring Generator Card (30 Watt) Central Office Ring Generator Card (75 volts RMS). [Supports up to 9 x 16 Port VF, FXS Cards] (To be ordered with FXS card (s) - one card per Chassis)
8.	VCL-MX-1545-04-48	4 Port, 64Kbps DCE [V.35,V.36, X.21, RS530, V.24, V.11, V.28] Synchronous OR [RS232 or RS485] Asynchronous Data Interface Card with Sub Rate Multiplexing (9 Cards / 36 Ports (Max) per Chassis)
9.	VCL-MX-1547-16-48	16 Port, Analog I/O Interface Card [Extend either Dry Relay Contacts (Relay Normally-Open or Relay Normally-Close) or operate switches remotely (using Dry Relay Contacts rated 2A @ 30Volts DC) between any two Multiplexers using a 64 Kbps time-slot] (9 Cards / 72 Ports (Max) per Chassis)
10.	VCL-MX-1558-04-48	4 Port, "n x 64" High Speed 64 Kbps to 1920 Kbps (User Configurable) DCE/DTE Synchronous Universal Data Interface Card [DCE/DTE (User programmable for DTE/DCE mode)] [V.35, V.36, X.21, V.11, RS422, RS530] (9 Cards / 36 Ports (Max) per Chassis)
11.	VCL-MX-1559-08-5.0	8 Port, RS232 (V.24/V.28 Line Drivers) 50bps to 19.2Kbps DCE Asynchronous Data Interface Card (9 Cards / 72 Ports (Max) per Chassis)
12.	VCL-MX-1560-08-5.0	8 Port G.703 @ 64Kbps, Synchronous Co-directional Data Interface Card (9 Cards / 72 Ports (Max) per Chassis)

13.	VCL-MX-1551-5.0-WLWL-DKM	8 E1 Plus 100Mbps 4 Ethernet (Electrical RJ45F) over Fiber Optical Transport Interface Card [2 x SFP based / without SFPs] [WLWL = SFP Wavelength 0850, 1310 or 1550 in nm, DKM = SFP Distance in Km, 002, 015, 040, 080, 120, 150, 200, 260] [SFPs to be ordered separately] (9 Cards / 72 Ports (Max) per Chassis)
14.	VCL-MX-1595-04-5.0	4 Port 10/100BaseT Ethernet Electrical Card. User configurable from 64Kbps to 1920Kbps. User Selectable Data Transfer Rate (Max. bandwidth per card 1920Kbps.)
15.	VCL-MX-1552-SM	4 Port, Integrated IEEE C37.94 Optical Interface, Duplex FC, 20KM, Single-Mode 1310nm (SM) Teleprotection Interface Card. Each 4-Port Interface card can be used to connect to upto 4, VCL-TP Teleprotection Terminals.
16.	VCL-MX-1552-MM	4 Port, Integrated IEEE C37.94 Optical Interface, Duplex FC, 2KM, Multi-Mode (MM) Teleprotection Interface Card. Each 4-Port Interface card can be used to connect to upto 4, VCL-TP Teleprotection Terminals.
17.	VCL-MX-1526-15R	1+1 Redundant Ring Generator Card (15 Watt x 2) Central Office Ring Generator (75 volts RMS). [Supports up to 4 x 16 Port VF, FXS Cards] (To be ordered with FXS card(s) - one Ringer card per Chassis)
18.	VCL-MX-1526-30R	1+1 Redundant Ring Generator Card (30 Watt x 2) Central Office Ring Generator (75 volts RMS). [Supports up to 9 x 16 Port VF, FXS Cards] (To be ordered with FXS card(s) - one Ringer card per Chassis)

19.	VCL-TP-1531	<p>VCL-TeleProtection Terminal Equipment</p> <p>19-Inch, 2U High Rack mountable Version [Core Equipment]</p> <ul style="list-style-type: none"> - Supports upto 8, 2-way independent-simultaneous command channels which may be configured to operate selectively or simultaneously over C37.94 Optical Fiber Interface, or 64Kbps PCM co-directional digital data Interface, or 2.048Mbps E1 digital data interface - OAM Card [10/100BaseT Ethernet - RJ45 (SNMP, Telnet and SSH) and Serial Port (USB and DB-9 COM Port)] - System Core Cables, Installation Accessories, Documentation, System User Manual etc (Set) - Graphical User Interface (GUI) and Network Management Software (NMS) - Command Voltages: 48V DC, 120V DC or 250V DC (factory set option, order any one) - Switching Voltages: 48V DC, 125V DC or 250V DC <p>Network Interfaces</p> <ul style="list-style-type: none"> - 1532 G.703 @ 64Kbps co-directional interface [1 (max) per system] OR - 1599 2.048Mbps E1 digital data interface [1 (max) per system] OR - 1533-SM Optical - 2M , Duplex FC, 20Km, 1310nm, Single-Mode (SM) [1 (max) per system] OR - 1533-MM Optical -2M , Duplex FC, 2Km, 1310nm, Multi-Mode (MM) [1 (max) per system] OR - 1566-SM Optical-SFP based, Duplex LC, Single-Mode (SM) [1 (max) per system] <p>PSU Options</p> <ul style="list-style-type: none"> - DC110 1 x 110/125V DC Power Supply Input [60-160V DC] OR - DC048 1 x -48V DC Power Supply Input [18V-75V DC] OR - DC110R 2 x 110/125V DC Power Supply Input [60-160V DC] [Redundant - 1+1] OR - DC048R 2 x -48V DC Power Supply Input [18V-75V DC] [Redundant - 1+1]
-----	-------------	---

Optional and Accessories

S. No.	Part #	Product Description
1.	VCL-ACDC-48-150W-3.2A-RK	Power Supply (External) AC to DC Converter 19" 2U Rack Mount Version, Universal AC Input [93V AC-276V AC, 47Hz-63Hz] to DC Output [(-) 48V DC~3.20A 150W] (Supports 4 Fused outputs)
2.	VCL-1505-TER-DB37F-RJ45F-16PP	16xE1/T1, DB37 [2 x DB37F] to RJ45 [16 x RJ45F] Termination Panel 19" Metal case 1U High Rack Mount Version with Hardware Set [Includes : DB37M-DB37M Cables] [RJ45 cables not included]
3.	VCL-1505-TER-DB37F-RJ45F-32PP	32xE1/T1, DB37 [4 x DB37F] to RJ45 [32 x RJ45F] Termination Panel 19" Metal case 1U High Rack Mount Version with Hardware Set [Includes : DB37M-DB37M Cables] [RJ45 cables not included]
4.	VCL-1505-TER-DB37F-RJ45F-48PP	48xE1/T1, DB37 [6 x DB37F] to RJ45 [48 x RJ45F] Termination Panel 19" Metal case 1U High Rack Mount Version with Hardware Set [Includes : DB37M-DB37M Cables] [RJ45 cables not included]
5.	VCL-1514_1513-TER-DB37F-BNCF-16PP	16xE1, DB37 [2 x DB37F] to BNC [32 x BNCF] Termination Panel 19" Metal case 1U High Rack Mount Version with Hardware Set [Includes : DB37M-DB37M Cables] [BNC cables not included]
6.	VCL-HRNS 1247	75 Ohms Connectorized Cable (BNCF-BNCF, 3m)
7.	VCL-HRNS 1264-4E1O	E1 4 Port Connectorized Cable [DB25M-Open] [1 cable each 4 Port E1 card]
8.	VCL-HRNS 1268-8E1Y37M	E1 8 Port Connectorized Cable [2xDB25M-DB37M] [1 cable each 8 Port VCL-1505-TER-DB37F-RJ45F-16PP]
9.	VCL-HRNS 1264FXO	FXS/FXO 8 Port Connectorized Cable [DB25M-Open] [1 cable each 8 Port FXS/FXO card]
10.	VCL-HRNS 1264ENO	E&M 2 Port Connectorized Cable [DB25M-Open] [1 cable each 2 Port E&M card]
11.	VCL-HRNS 1264IOOD	AIO 8 Port Drive Connectorized Cable [DB25M-Open] [1 cable each 8 Port AIO card]
12.	VCL-HRNS 1264IOOS	AIO 8 Port Sense Connectorized Cable [DB25M-Open] [1 cable each 8 Port AIO card]
13.	VCL-HRNS 1264G7O	G.703 4 Port Connectorized Cable [DB25M-Open] [1 cable each 4 Port G.703 card]
14.	VCL-HRNS 1277V35O	V.35 1 Port 64Kbps Connectorized Cable [DB25M-Open] [1 cable each 1 Port V.35 64Kbps card] OR
15.	VCL-HRNS 1073V35F	V.35 1 Port 64Kbps Connectorized Cable [DB25M-Winchester F] [1 cable each 1 Port V.35 64Kbps card] OR
16.	VCL-HRNS 1075V35M	V.35 1 Port 64Kbps Connectorized Cable [DB25M-Winchester M] [1 cable each 1 Port V.35 64Kbps card]

17.	VCL-HRNS 1279V36O	V.36 1 Port 64Kbps Connectorized Cable [DB25M-Open] [1 cable each 1 Port V.36 64Kbps card] OR
18.	VCL-HRNS XXXXV36F	V.36 1 Port 64Kbps Connectorized Cable [DB25M-DB37F] [1 cable each 1 Port V.36 64Kbps card] OR
19.	VCL-HRNS XXXXV36M	V.36 1 Port 64Kbps Connectorized Cable [DB25M-DB37M] [1 cable each 1 Port V.36 64Kbps card]
20.	VCL-HRNS 1278-21O	X.21 1 Port 64Kbps Connectorized Cable [DB25M-Open] [1 cable each 1 Port X.21 64Kbps card] OR
21.	VCL-HRNS XXXXX21F	X.21 1 Port 64Kbps Connectorized Cable [DB25M-DB25F] [1 cable each 1 Port X.21 64Kbps card] OR
22.	VCL-HRNS XXXXX21M	X.21 1 Port 64Kbps Connectorized Cable [DB25M-DB25M] [1 cable each 1 Port X.21 64Kbps card]
23.	VCL-HRNS 1264RS2V2ORev1	RS232/V.28 1 Port 64Kbps Connectorized Cable [DB25M-Open] [1 cable each 1 Port RS232/V.28 64Kbps card]
24.	VCL-HRNS 1279RS5V1O	RS530/V.11 1 Port 64Kbps Connectorized Cable [DB25M-Open] [1 cable each 1 Port RS530/V.11 64Kbps card]
25.	VCL-HRNS 1264RSO	RS232 2 Port Connectorized Cable [DB25M-Open] [1 cable each 2 Port RS232 card] OR
26.	VCL-HRNS 1264RS9F	RS232 2 Port Connectorized Cable [DB25M-2xDB9F] [1 cable each 2 Port RS232 card] OR
27.	VCL-HRNS 1264RS9M	RS232 2 Port Connectorized Cable [DB25M-2xDB9M] [1 cable each 2 Port RS232 card]
28.	UMIKitMXV6	System CORE Cables, Installation Accessories, Documentation, System User Manual, Systems User Manual Disk, etc [Set]

Technical specifications are subjects to changes without notice.
 Revision 3.9 – July 11, 2013.

AceCom Networks Pte Ltd.

200 Jalan Sultan, #02-13 Textile Centre,
 Singapore 199018
Phone: +65 6295 3233, **Fax:** +65 6295 3133
E-mail: sales@acecomnet.com
Web Site: http://www.acecomnet.com